FORM PTO-1 (REV 10-2000	390 US DEPAR	TMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER						
	RANSMITTAL LETTEI	R TO THE UNITED STATES	108627.124						
1	DESIGNATED/ELECT	U.S. APPLICATION NO. (If known, see 37 CFR 1.5)							
CONCERNING A FILING UNDER 35 U.S.C. 371 U9/64/90									
	ATIONAL APPLICATION NO. /EP99/02424	INTERNATIONAL FILING DATE 9 April 1999 (09/04/99)	PRIORITY DATE CLAIMED 9 April 1998 (09/04/98)						
TITLE	TITLE OF INVENTION Bi-Directional Broadcasting System								
APPLICA	ANT(S) FOR DO/EO/US	es Heichler, et al.							
Applican			owing items and other information:						
1. 🗵	ant herewith submits to the United States Designated/Elected Office (DO/BO/US) the following items and other information: This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.								
2.	This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.								
3.	This is an express request to promptly begin national examination procedures (35 U.S.C. 371(§).								
4. X	The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).								
5. X									
	a. x is attached hereto (required only if not communicated by the International Bureau).								
	b. has been communicated by the International Bureau.								
. =	c. is not required, as the application was filed in the United States Receiving Ofice (RO/US).								
6.1		of the International Application as filed (35							
/· ⊔	Amendments to the claims of the International Application under PCT Article 19(35 U.S.C. 371(c)(3))								
	a. \square are attached hereto (required only if not communicated by the International Bureau).								
	 b. have been communicated by the International Bureau. c. have not been made; however, the time limit for making such amendments has NOT expired. 								
			mens has 1401 explica.						
я П	d. have not been made and will not be made. An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C371(c)(3)).								
9. K	An earth or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).								
10. K									
10. 62	An English language translation of the annexes to the International Preliminary Examination Repαt under PCT Article 36 (35 U.S.C. 371(c)(5)).								
	11 to 16 below concern document	t(s) or information included:							
11. X									
12. X	An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.								
13.	A FIRST preliminary amendmen	ıt.							
	A SECOND or SUBSEQUENT preliminary amendment.								
14.	A substitute specification.								
15. X	A change of power of attorney and/or address letter.								
16.	Other items or information:								

422 Rec'd PCT/PTO 0 6 OCT 2000

ATTOMETYS DOCUMENTALISM
PCT/EPP9/02424

CALCULATIONS PTO USS ONLY

09	/64/901	PCT/EP99/02424		10862/	1.24			
40 V 77 C				CALCULATIONS	PTO USE ONLY			
DACIC NATION	llowing fees are submitted: IAL FEE (37 CFR 1.492 (a)	(1)-(5)):	ſ					
Noither inter	national preliminary examin	ation fee (37 CFR 1.482)						
		01000.00						
and Internation	onal Search Report not prepa	\$1000.00						
International	mediminary examination for							
USPTO but I	international Search Report p							
International	preliminary examination fee	PTO but						
international	search fee (37 CFR 1.445(a	\$/10.00						
International	preliminary examination fe							
but all claim:	s did not satisfy provisions o							
International	preliminary examination fe is satisfied provisions of PC	\$100.00						
and all claim	ENTED ADDO	PRIATE BASIC FEE AM	IOUNT =	\$ 0.00 00				
				860.00				
Surcharge of \$13	0.00 for furnishing the oath	or declaration later than 20	30	\$	l			
	earliest claimed priority da		DATE					
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE X \$18.00	s 0	I			
Total claims	17 - 20 =		X \$80.00	\$ 0 \$ 0				
Independent claim		11)	+ \$270.00	s 0				
MULTIPLE DE	PENDENT CLAIM(S) (if appl			s				
		OF ABOVE CALCULAT						
Applicant	claims small entity status.	See 37 CFR 1.27. The fees in	ndicated above	\$				
are re duced	1 by 1/2.			s				
			OTAL =					
Processing fee of	f \$130.00 for furnishing the	English translation later than	□ 20 □ 30	\$	l			
months from the	months from the earliest claimed priority date (37 CFR 1.492(1)).							
	TOTAL NATIONAL FEE = \$							
Fee for recording	Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property							
accompanied by	an appropriate cover sheet	\$900.00						
TOTAL FEES ENCLOSED =			Amount to be	s				
1				refunded:				
				charged:	\$ 900.00			
	1: 4 6	to cover the above	ve feer is enclose	vd				
a. L. A che	ck in the amount of 3	to cover the above	ve rees is enclose	AL.				
1 _								
b. Please	charge my Deposit Accoun	t No. <u>08-0215</u> in the	amount of \$_90	00.00 to co	ver the above fees.			
	dicate copy of this sheet is e							
c. K. The C	commissioner is hereby auth	orized to charge any additional	fees which may	be required, or credit beet is enclosed	any			
c. The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 18-0219 A duplicate copy of this sheet is enclosed.								
NOTE: W/L	NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR							
1.137(a) or (b)) must be filed and granted to restore the application to pendin g status.								
	.,,			()				
SEND ALL CORE				1-1				
	RESPONDENCE TO:		lon	u				
1			O	u/				
Wayne	M. Kennard, Esq.		SIGNAT	URE:				
Wayne Hale				M / Vure: yne M. Kennar	1			
Wayne Hale : 60 St	M. Kennard, Esq. and Dorr LLP	2109	SIGNAT Way	w / Vure:	1			
Wayne Hale : 60 St	M. Kennard, Esq. and Dorr LLP ate Street	2109	NAME	URE: yne M. Kennary	1			
Wayne Hale : 60 St	M. Kennard, Esq. and Dorr LLP ate Street	2109	NAME 30		1			
Wayne Hale : 60 St	M. Kennard, Esq. and Dorr LLP ate Street	2109	NAME 30	,271	1			

()

13/prk.

422 Rec'd PCT/PTO 0 6 OCT 2000 Broadcasting System

FIELD OF THE INVENTION

The present invention relates to a system suitable for RF distribution of analogue and digital television signals as well as forward (here called: downstream) interaction channels.

Technical means for generating a return channel from the user's premises are provided to perform the (here called: upstream) interaction from the user.

Additional means to guarantee a certain quality of the user radiated signal are provided in the system.

Systems like these are often called "LMDS" (Local Multipoint Distribution System) and can be used for re-broadcasting programmes from satellite or cable as well as providing a service for interaction within or besides the broadcasting scenario. The channel bandwidth is flexible for each direction.

BACKGROUND OF THE INVENTION

LMDS comprises systems for distribution of video and audio signals by microwave links in small-area coverage regions. Thus, LMDS often is called "wireless cable" incorporating the distribution of signals from a base station within a cell composed of a defined number of users with set top boxes as terminals. E.g. the carrier frequency range from 40.5 ... 42.5 GHz is a possible operation range for this service.

As a state-of-the-art, analogue (FM modulated) systems for video and audio distribution are beginning to become available on the market. With certain modifications an application for digital carriers (quarternary phase shift keying QPSK modulation) is possible. Return channels for interactions so far are not yet implemented.

The RF distribution is generally performed by using hom antennas with a gain of approximately 15 dBi at the base station site and 35 dBi at the user terminal site. The coverage of the system often is indicated with a radius ranging from 1 ... 5 Km depending on weather conditions (rain attenuation). A basic problem is revealed by the fact that the user terminal has to radiate a return channel signal with sufficient stability and broadcasting quality in the 40 GHz range which is not yet technically solved in terms of a reliable and mass-market suitable solution.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide the systematical and technical solution of an LMDS system for the operation in the 40 GHz frequency ressource or above.

It is also an object of the invention to provide technical means for an improvement of the signal radiated by the user terminal (set top box).

A further object of the invention is the facility to separate the 40 GHz signal processing from the modulation processing in a way that

- 1. A separate outdoor unit may be defined remote from the modulation equipment.
- The cabeling running from the said modulation equipment to the said outdoor unit can be structured like conventional SMATV (Satellite Mastered Antenna TV) equipment for inhouse distribution.

The invention is defined in the independent claims. The dependent claims define particular embodiments of the invention.

According to one embodiment of the invention there is provided a base station consisting of a transmitter system composed of a radiation and reception antenna as a combined or separate devices, a power amplification stage, an upconversion stage as well as a multicarrier modulation equipment for yielding one

- med

()

or more carriers for broadcasting or interaction activity with variable symbol rates and signal bandwidths. The base station also consists of reception paths comprising low noise receivers connected to the antenna, down converters to present the received spectrum within a defined IF range as well as analyser - demodulator stages to exploit the carriers received. Additional links of the base station to other telecommunication networks as e.g. satellite segments are provided. In this case suitable interfaces to the said networks are to be defined, which can be done in a well-known manner.

According to an aspect of the invention there is provided a highly stable frequency reference ("beacon") to be radiated together with the other carriers at a well-defined location in the spectrum with the purpose to offer a return channel transmission reference frequency for the user terminals.

According to an embodiment of the invention there is provided a user terminal at the user's site to receive the said signals radiated by the base station and to process them in a suitable manner for enabling broadcasting reception and mutual interaction between the base station and the user.

According to a further embodiment of the invention data signalling between the base station and the user terminals as well as vice-versa is provided. Details of signalling as e.g. the data format, the protocols etc. may be a subject to change depending on special solution.

In an embodiment of the invention to be described in detail hereinafter the LMDS system structure comprises a base station with a partitioning of the frequency ressource as well as a user terminal.

In another embodiment of the invention to be described in detail hereinafter the technical means for receiving the beacon as well as the downstream carriers comprises a low noise amplifier in combination with a block down converter. Suitable filters to reject image frequencies are also applied.

()

In a further embodiment of the invention to be described in detail hereinafter the technical means for exploiting the highly stable reference frequency comprises oscillators, synthesizers and mixers as well as suitable filters.

In a further embodiment of the invention to be described in detail hereinafter the technical means for radiating the upstream carrier from the user terminal comprises a suitable modulator, a sufficient stable local oscillator and a suitable upconverter. Suitable filters to reject image frequencies are also applied.

In a further embodiment of the invention to be described in detail hereafter the technical means for exploiting the user radiated upstream carriers at the base station's site comprises FFT (Fast Fourier Transform) circuits or MCD (Multi Carrier Demodulator) as well as a stack of single carrier demodulator circuits.

In a further embodiment of the invention to be described in detail hereafter the technical means and structures for enabling single user as well as SMATV featured operation at the user terminal's site comprises $\mathsf{DiSEqC}^{^{\mathsf{N}}}$ (Digital Satellite Equipment Control) or analogue switching criteria compatible switches as well as conventional in-house cabeling equipment.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will hereinafter be described with reference to the accompanying drawings, in which:

- FIG. 1 shows the structure of one so-called LMDS cell;
- FIG. 2 depicts the repeated array of a plenty of said cells;
- FIG. 3 expresses an example of the spectrum yielded by the base station as well as the user terminal:
- FIG. 4a shows the downstream generation by block conversion of completely backhauled carrier combs;
- FIG. 4b describes the downstream generation by power combination of single modulator signals;

- FIG. 5 describes a compact solution for the processing of the downstream carriers, the beacon and the upstream carrier(s);
- FIG. 6 describes the application of FIG. 5 as a component to be used for construction of a universal outdoor unit for in-house distribution;
- FIG. 7 demonstrates the reception of the upstreams with a stack of single demodulators:
 - FIG. 8 demonstrates the same reception with a multicarrier demodulator;
 - FIG. 9 demonstrates the same reception using an FFT stage;
 - FIG. 10 describes the structure of a single user application;
 - FIG. 11 describes the same structure for multi user operation like SMATV;
- FIG. 12 shows schematically the aerial structure composed of the elements of FIG. 6 and a wavequiding/filtering system.

DETAILED DESCRIPTION OF THE EMBODIMENTS

According to an embodiment of the invention, an LMDS structure (FIG.1) generally shows up as a point - to - multipoint distribution on one hand concerning the paths running from the base station to the user terminals and as a multipoint - to - point distribution on the other hand concerning the paths running from the user terminals to the base station. No signal way is switched bypassing the base station.

The LMDS structure repeats itself (FIG.2) in the shape of so-called cells comprising an entity of users forming a group in the sense that this group is supplied with all necessary signals by the base station. The base station itself comprises the facility to exchange signals with other networks as e.g. satellite space segments. It may consist of RF processing equipment as well as baseband processing equipment in its farthest sense. FIG.3 shows the possible spectral ressource exploited by the communication partners: It comprises for two polarizations, horizontal and vertical, the downstream carriers denoted from e.g. 40.6 ... 42.65 GHz, a beacon located at e.g. 42.75 GHz as well as the upstream carriers denoted from e.g. 42.85 ... 43.4 GHz. Suitable guard bands are inserted at the borders of each particular ressource.

The generation of the downstream RF signal is one major task of the base station

Generally there are two possibilties to radiate downstreams in a wide band multicarrier manner:

- a) Re-Broadcasting e.g. a complete satellite segment by block upconversion to 40 GHz, without remodulation. In this case, the content of the downstreams is not changed.
- b) Remodulation of a selected subset of channels, e.g. from telecom's cable systems or satellite with adoption of adjacent data information like NIT (Network Information Table) and/or generation of interaction. In this case, a construction of power combination at an IF or RF level may be provided.
- FIG. 4a shows the first approach: A satellite segment is received as a whole by a so-called "backhaul antenna" and firstly downconverted to the SAT IF band by a so-called wide band LNB (Low Noise Block Converter). This frequency band is then filtered and power levelled to adopt to the upconversion stage following. After another filter for image band rejection the re-broadcasting signal is power amplified by a HPA (High Power Amplifier) to supply the antenna with sufficient amplitude per channel required by the overall path link budget.

It is important to note that for this kind of multicarrier uplink sufficient power amplifier backoff must be provided to keep inter-carrier-intermodulation below certain values. Thus, the total available linear operation power of an N - carrier amplifier must be backed off by at least BO = 20 log(N), i.e. for a single carrier, no backoff is necessary, for two carriers, 6 dB backoff must be provided due to the double beat frequency amplitude etc.. This results that for large re-broadcasting scenarios HPAs with sufficient saturation power must be implemented, which can be done by using TWTs (travelling wave tubes) or wide-band high-power semiconductor amplifiers.

FIG. 4b shows the power combination approach for the IF or the RF level, here drawn as an example for the IF level: TV programmes as well as data may be collected from remote ("channels from remote") e.g. by reception and demodulation. In a baseband processing stage, which may be of distributed structure, the transport

(3

data streams are combined in a wanted manner. Here, also interaction channels can be inserted. Then the resulting streams are fed into the downstream modulators providing at each output an e.g. QPSK modulated digital carrier signal. These carriers are upconverted in a first stage by a LO (local oscillator) and filter management, power combined to achieve a carrier comb of all signals as a sum and then further upconverted to RF level. This is the resulting frequency multiplex for the HPA to be radiated to the user terminals.

Of course, a combination of both solutions is possible, e.g. if re-broadcasting channels are mixed with embedded or non-embedded interaction downstreams.

Another solution is the combination of single carriers at the RF level by single amplifiers, filters and power combiners, as it is known from satellite uplinks, or the use of one antenna per channel, but these solutions are not described here in detail because of the lack of economy when a plenty of carriers (30 transponders per satellite segment / one polarization!) shall be radiated.

The communication between the cells as well as the communication with a remote service provider may be realized by using conventional foreign networks (telecom's networks) or alternatively special networks tailored for this purpose.

The so-called user terminal mainly consists of two blocks (see also FIG.10): An outdoor unit and an indoor unit. In case of a house distribution (see also FIG.11) of LMDS IF signals, the user terminal embodies each path being rooted from the building roof (outdoor) via cables, switches etc. through the building to the set top box into the user's room (indoor). The set top box comprises means for reception (selection) of an IF level downstream channel as well as means for transmission (modulation) of an IF level upstream channel. In addition to this, means for transmitting a command set (e.g. DiSEqCTM) are provided for governing the outdoor Unit / in-house distribution switches.

The purpose when exploiting the highly stable radiated beacon signal is to upconvert the modulation signal of the upstream by keeping the quality of the said beacon clean carrier. In practice, the upconversion incorporates some necessary

filtering to separate the wanted signals from unwanted image signals as well as from wanted signals in the spectral vicinity of the beacon. This filtering is hardly feasible at the 40 GHz level due to the limitation of slope steepness being necessary for separation. Thus, filtering must be performed at a suitable IF level.

Converting the high quality beacon signal to an IF level unfortunately means involving another low - quality local oscillator in the process and therefore a degradation of the result. A way out of this problem concerns a further embodiment of the invention comprising a so-called differential mixing stage as shown in a specific embodiment in FIG. 5.

The same stage serves for downconverting the downstream carriers to a suitable IF level, and the same stage serves for upconverting the upstream carrier(s) to the wanted 40 GHz RF level.

A downconversion of the beacon signal is performed by a first mixing, the resulting signal is filtered, and a modulation then is added. The modulated signal is filtered and then upconverted, thereby the jitter of the local oscillator signal is cancelled out. Simultaneously, a downconversion of the downstream signal $f_{\rm down}$ is performed using the first mixer also used for the beacon signal. The thereby downconverted signal is coupled out using a beam splitter. This will become more apparent from the following detailled description in connection with Fig. 5.

FIG. 5 shows the technical block circuit diagram for realization: A suitable antenna consisting of e.g. a dish reflector or a lens microwave collimator is equipped with a multiport feed enabling the separated routing of transmission and reception power. Here, the two ports for one linear polarization are shown.

At the reception port, a low noise amplifier LNA is connected to enhance the reception signal power of the two signals f_{beacon} and f_{down} . A first mixing stage M1 downconverts these signals to an IF level with the aid of a suitable oscillator DRO and two fequency doublers postconnected. This oscillator signal enters M1 with the frequency f_{LO} + Δf where Δf denotes phase noise and drift introduced.

As a first result, the IF level of the downstreams is achieved by a power splitter SP presenting the signals at

for the user terminal IF input. The value ∆f has in this case to cope with user terminal input phase noise and drift requirements like conventional satellite downlink LNBs feature.

Note, that the Δf magnitude occurs at this point with negative sign.

Further, a filter F1 extracts the downconverted beacon signal at the spectral level

behind the second port of SP with sufficient bandwidth to keep the entire Δf magnitude for further processing.

In a next step, the modulation frequency f_{mod} is added by a second signal multiplier M2 which results a spectral level:

$$f_{beacon}$$
- f_{LO} - Δf + f_{mod}

and which is filtered again with sufficient bandwidth to keep the entire Δf magnitude.

A last upconversion of this signal is performed by a third mixer M3 yielding:

$$f_{\text{beacon}} - f_{\text{LO}} - \Delta f + f_{\text{mod}} + f_{\text{LO}} + \Delta f$$

= $f_{\text{beacon}} + f_{\text{mod}}$

with the basic result that the signal entering the transmitter power output stage PA only comprises the errors of the two components f_{beacon} and f_{mod} . Since these errors are well - defined and small (f_{mod} is a frequency within the range of 100

MHz or somewhat more and thus can be easily generated by crystal oscillator technique), the upstream signal achieves broadcasting quality with only few ppm drift and phase noise avoiding exhaustive costs.

In principle, the beacon signal operating as a reference frequency could also be generated at the user-site, e.g. at the outdoor unit or even at the set-top box as soon as such a solution becomes technically feasible in terms of the quality and the costs of the corresponding oscillators being available.

According to a further embodiment, the incoming upstreams are located at arbitrary places in the provided spectral ressource range (see FIG.3). In case of TDMA (Time Division Multiple Access) operation the suitable modulation method will be a burst modulation starting and stopping carrier radiation synchronously to a master clock or asynchronously by a base station command, in case of continuous operation, user carrier switching on and off will only be done at beginning and end of transmission by base station frequency management.

In both cases, suitable demodulation equipment serves for extracting digital data from carrier. This extraction can be generally performed by three means:

1) Separate demodulators, as many as carriers are on air, 2) so-called multicarrier demodulators (MCD) being able to demodulate N carriers by one device, 3) so-called fast fourier transformers (FFT) being capable to analyse the whole spectrum being on-air and to present the result by real and imaginary component data, which is similar to demodulation. The embodiments shown in Figures 7 to 9 respectively illustrate these three possibilities for demodulation.

FIG. 7 shows solution 1) with the separate demodulators: The incoming RF signal as a whole is in a first step received by a sufficient wide-angle antenna, then low - noise amplified and downconverted with a first LO to an IF level for better further processing. This LO might be switched in frequency for suitable range selection, if necessary. Then, the signal is pre-filtered and amplified a second time to be splitted by a power splitter and to be downconverted by an N-fold downconverter bank followed by an N-fold filter bank for the second IF level. The number N

corresponds to the number of subscribers associated to one base station and therefore to one LMDS cell. The downconverter oscillator frequencies for the downconverter bank are organized by a so - called 2nd LO management stage comprising a synthesizer stage with a computer interface. This interface accepts data from the station computer serving for the station management as a whole. The station computer is also a means for communication with other base stations or the central service provider as well as for processing the internal station data streams.

The filter bank is followed by an N-fold demodulator bank being capable to present the upstream carrier content in the baseband format for further baseband processing. This processing depends on the momentaneous LMDS return channel application and therefore is a free parameter. Among other things it comprises the separation of real-time and non real-time tasks of baseband processing.

E.g. real-time tasks are:

- · Direct user interaction,
- · TDMA processing (synchronization) in case this is used,
- · Scrambling for conditional access.

E.g. non real-time tasks are:

- Setting of the upstream carrier frequencies and transmitting them to the individual subscribers,
- Commanding the begin and end of a user session as well as receiving wishes from user terminals for beginning and ending a session.

FIG. 8 shows solution 2) with the MCD circuit:

The signal reception is performed in a similar way to solution 1). The difference in this case is that the further processing is done by a quadrature downconversion stage presenting an I and Q component of the IF composite signal. Two sampling A/D - converters follow to digitize the signal being then represented as real and imaginary numbers of n bits width at the outputs. The multicarrier demodulator postconnected is a sufficient fast integrated circuit or a composition of

those presenting at its N outputs, corresponding to the N subscribers, the demodulated baseband signals. The further processing is identical to solution 1).

FIG. 9 at last demonstrates the FFT solution 3). The basic idea is to analyse the time - domain received signal according to the laws of fourier transform. The maximum number of subscribers must be known before implementation, i.e. the FFT stage must be tailored to a sufficient number of carriers occurring.

Generally, this FFT unit consists of so-called butterfly networks accepting at their inputs N complex time-domain samples at word length n and presenting at their outputs N complex coefficients at word - length n describing the input signal in terms of real and imaginary component at a spectral one-of-N location. This is similar to the demodulation representation of the single carrier at the respective location.

The signal is received in a similar manner to the other solutions, i.e. it is first downconverted and pre-filtered as well as amplified. Since the FFT stage needs real and imaginary samples as the MCD does, a quadrature downconversion is provided as well. The grade of the downconversion depends on the A/D converters sampling rate and thus on the technology available. Above all, Shannon's sampling law must be fulfilled describing that a signal with the maximum frequency component at f must be sampled with 2f. In practice, the quadrature downconversion will be done in a way that the lowest frequency component is near baseband. The highest frequency component of the signal must be then within the range that is technologically feasible by the hardware.

The two rotational switches postconnected to the A/D converters denote the periodic sampling process feeding the sampled signal data into the FTT processing stage with a speed being at least 1/T = 2f when T is the period between two switch positions and f is the maximum frequency component of the sampled signal.

The further processing of the outgoing N complex demodulation products is identical to the other solutions.

()

The applicability of the MCD and FFT solution depend on the technology available since a large number of upstream carriers corresponds to a large processing bandwidth and thus, speed, which only can previously be presented by advanced ASIC technology. However, if these approaches are feasible for a specific solution, the single demodulator stack solution with its enhanced amount of hardware equipment can be circumvented.

Generally, LMDS is planned to be a system joining one user terminal (set top box) with one outdoor antenna unit. Nevertheless, regarding certain difficult reception scenarios like urban areas, it might be necessary to install one outdoor unit on the roof of a building to supply a plenty of user terminals with downstream signals on one hand and collecting the upstream signals on the other hand.

In the following embodiment, the principle depicted by FIG. 5 is extended to a single user as well as to an SMATV - like application.

First, FIG. 10 shows the compact solution of the single user environment fulfilling the operation requirements of the spectrum depicted in FIG. 3. Indoor - and outdoor unit are interconnected by one single transportation cable carrying the signal composite spectrum from e.g. 100 ... 2150 MHz as an IF layer. Additional command signals are supplied via the DiSEqC™ command set becoming a state-of-the-art standard in modern in-house satellite distribution networks. The indoor unit (set top box) principally consists of a downstream receiver ranging from e.g. 950 - 2150 MHz, a modulator for the upstreams ranging from e.g. 100 - 650 MHz as well as a DiSEqC™ control device for governing the outdoor unit.

The outdoor unit consists of a mixing and downconversion stage for each polarization, H and V, as basically designed in FIG. 5 with a switch for selecting the downstream high - and low band by two DROs (Dielectric Resonator Oscillator) DRO I and II. This is known from the satellite distribution scenario ("Universal LNB") and embodies the fact that the user terminal IF frequency range is limited to 1.2 GHz versus the whole reception IF range is 2.05 Ghz.

In this solution example two frequency doublers are added for quadrification of the DRO frequency. The two bands are thus distinguished by applying a different oscillator frequency e.g. of f_1 + 4 x 0.2125 GHz = f_1 + 0.85 GHz to the mixing stages. This is similar to the satellite reception applying 9.75 GHz + 0.85 GHz = .10.6 GHz. The upstream processing is performed as shown in FIG. 5 by exploiting the beacon signal. An emergency shutoff is provided as well as a possible power control by the indoor unit, signalled by the base station, to adopt the radiated power to the geographical location (distance). This is also kown from GSM mobile telephone operation. A control device receiving the DiSEqCTM commands is also part of this stage. Suitable filtering is provided for signal selection.

Couplers and power splitters are provided for signal addition / separation for transportation over single cable.

This cable shall be a conventional high-quality satellite IF distribution cable with a length of - depending on cable loss - up to approximately 50 meters.

The multi user terminal application is also a subject of this embodiment: FIG. 6 firstly shows how the system depicted by FIG. 5 can be concentrated and somewhat modified to one block being able to form a sub-element for an outdoor unit in the environment of a house distribution. This block unit shall also be called a Bidirectional Block Converter ("BBC") referring as an analogy to the state - of - the art LNB (Low Noise Block Converter) being now defined for bidirectional operation. It comprises, in addition to the elements described in FIG. 5, a mixer M5 and an LO at e.g. 2.2 GHz or another suitable frequency to downconvert the upstream IF level carriers at e.g. 2300 ... 2850 MHz running over the house distribution down to the values of e.g. 100 ... 650 MHz demanded in FIG. 5. This is provided to keep the IF frequency range in the cable below 950 MHz free in order to enable terrestrial in house distribution as well. Thus, the BBC has five elementary ports: The two ports at the RF level for the transmit feed TXF and the reception feed RXF as well as the two receive ports for reception in the high and the low band RX_H and RX_L at the IF level. Only one additional port for transmission $TX_{x \text{ or } y}$ for each polarization is necessary.

Church Toose

Using this block, the so-called LMATV BBC (= LMDS MASTERED TELEVISION BIDIRECTIONAL BLOCK CONVERTER) can be ANTENNA constructed: FIG. 11 depicts an in-house distribution with this kind of block converter: Two BBCs, applied to the corresponding antenna feeds, are used to supply the inhouse IF level with the eight possible combinations composed of bands and polarizations:

Transmit		Receive		
XPOL	YPOL	XPOL	YPOL	
TXband		HighBand		
TXband			LowBand	
	TXband	LowBand		
	TXband		HighBand	
TXband		LowBand		
TXband			HighBand	
	TXband	HighBand		
	TXband		LowBand	

Table 1

Because the transmit band is not composed of two particular ranges (TXband only), eight combinations are sufficient and can be carried by six conventional SAT root cables as they are commonly used for two-position - SAT inhouse distributions. Four cables are then used for the downstream signals as it is the case in the SAT application: Reception of high and low band as well as x and y polarization. Two additional cables serve for transmission: X and Y polarization of the upstreams. (In the case of a former two SAT in-house distribution with eight cables, two cables can be rejected). Additionally, the SAT roof antenna must be replaced by the LMATV aerial described above.

Since the outdoor unit has now to process a plenty of user terminal return carriers, power control and emergency shutoff have now to be performed by cutting off the individual modulation signal of each user terminal separately by base station command.

A Bidirectional Multiswitch BMS replaces the old unidirectional in-house distribution multiswitches as it is drawn here for two user outlets. This switch comprises connections for the six LMDS and one terrestrial root cables being looped-through as well as for the user outlets leading to the wall plugs. The user outlet cable carries the composite signal with terrestrial or cable TV signals at e.g. 0.05 ... 900 MHz, SAT IF signals at e.g. 950 ... 2150 MHz and upstreams at eg. 2300 ... 2850 MHz. Inside the switch, these particular signals are coupled out of / into the root cables by suitable couplers. Suitable filters serve for the signal separation being necessary to avoid crosstalk. The DiSEqC™ control is performed in this switch as well, now simulating an LMATV BBC to the indoor unit. In case a command is sent, the BMS configures the corresponding outlet by setting the switches to the demanded positions. Thus, a simple solution with low costs is possible for LMDS replacing the usual SAT distribution.

FIG. 12 shows the RF part of the aerial itself in a schematic manner.

The two BBCs supply and achieve their signals via their transmit ports $TXF_{x/y}$, as well as via their receive port connections $RXF_{x/y}$ by suitable 40 GHz waveguides. The IF ports $TX_{X/Y}$ and $RX_{H/L/X/Y}$ shall be realized with suitable coaxial cable connections. Transmit and receive paths in the feed combination system must be sufficiently decoupled to avoid end-around oscillations within the BBC - aerial system.

Claims

-20,

7. A user-site reception system for receiving TV and/or audio and/or data signals transmitted from a base station, said system comprising:

means for receiving downstream signals transmitted from a base station;

means for generating upstream signals to be transmitted to said base station using a high-precision signal which can be transmitted from said base station as a reference, said means for personal superfrom signals further comprising:

2. 8: A user site reception system according to claim, in, wherein said system is a reception-interaction system for a LMDS system, said reception system further comprising:

means for command reception from a base station;

means for user interaction with said base station.

3. A system according to one of claims 7 or 8, said system comprising:

means for exploiting the high-precision beacon signal, said mixer comprising:

frequency processing means for upconverting the upstreams, given by modulator IF outputs, without any influence of parasitic phase noise and drift generated by receiver located conversion LOs:

means for downconversion of downstreams;

means for suitable filtering of frequency bands.

10. A reception system according to one of claims 7 to 9, wherein said-means for exploitation of a high precision beacon signal comprises:

means for downconverting said beacon signal using a-first local oscillator frequency;

means for upstream modulation of said upstream signal onto said downconverted signal;

means for upconverting said upstream modulated downconverted signal using said-first local oscillator frequency, which has been used for downconverting.

4. M. A reception system according to one of claims 7 to 10, comprising:
at least one upstream signals generating means according to one of claims

7 to 10;

means for processing of polarizations and frequency bands for up- and downstreams;

means for connecting to an IF frequency level to be connected to an inhouse distribution infrastructure;

means for connecting to an RF frequency level to be connected to a radiator/receptor;

means for power amplification.

5. 12. A single user outdoor unit, comprising:

at least one upstream signal generating means according to one of claims $\mathcal V$ to $\mathcal M$;

switching means for switching between frequency bands and polarizations for downstreams and between polarizations for upstreams;

means for connecting to a IF frequency level to be connected to an indoor unit.

- 6. 18. A unit according to claim 12, further comprising means for remote control (e.g. DiSEqCTM) for functions including at least power control and emergency shutoff.
- 7. 14. An indoor unit to be connected to an outdoor unit according to claim 12 or 18 or to an in-house distribution component, said indoor unit comprising:

receiving means for the reception of downstream signals;

demodulation means for demodulating the downstream signals;

modulation means for generating an upstream carrier based on a highposition beacon signal transmitted from a base station as a reference signal for the generation of said upstream carrier;

control means for generating switching commands.



8. 15. An indoor unit according to claim 14, further comprising one of the following:

means for exploiting base station commands to allocate upstream carriers and/or power:

means to control or shut off the upstream carrier power.

 18. An indoor unit according to one of claims 14 or 15, further comprising: an in-house distribution component, comprising:

switching means for switching the connection between individual user indoor units and the outdoor unit.

10. 17. An indoor unit according to claim 16, wherein said switching means comprises means for bidirectional switching between

the user indoor units and the outdoor unit.

11. 18. An indoor unit according to one of claims 18 or 17, wherein said in-house distribution component further comprises:

means for controlling the switching in response to signals received from said indoor unit;

means for connecting to an IF frequenccy level to be connected to said indoor unit.

12. A system according to one of claims 1 to 11, further comprising:

-> page 22a



4.A base station for broadcasting or re-broadcasting of TV and/or audio and/or data signals, said station comprising:

means for transmitting downstream signals from said base station to at least one user terminal;

means for receiving upstream signals transmitted from said at least one user terminal:

means for transmitting a high-precision beacon signal as reference signal for the generation of said upstream signals.

73. 2: A base station according to claim 1, wherein said base station forms a part of an LMDS provider-site distribution system, and wherein said base station of said system further comprises one or a combination of the following:

means for baseband processing, modulation, and power combination of downstream carriers and/or

means for block conversion and power amplification of downstream carriers as well as demodulation of arbitrary numbers of upstream carriers:

means for station management;

means for controlling interactively communication frequencies and power.

means for communication with adjacent cells and a remote service provider; means for communication with other networks like satellite and/or cable.

14. 3. A base station according to one of the preceding claims, said base station comprising:

an upstream reception system with a stack of single demodulators comprising:

means for low noise amplification;

means for downconverting from RF to a first IF level;

means for power splitting;

a downconversion mixer bank for individual upstream carrier downconversion:

means for generating individual LO frequencies;

means for filtering;

a demodulator bank;

means for baseband processing to exploit the incoming demodulated upstream data.

75. A. A base station according to claim \mathcal{Z}_{i} further comprising means for arbitrarily configuring the demodulation mode.

76. 5: A base station according to one of claims X or X, further comprising:

an upstream reception system with a multicarrier demodulator system comprising:

means for low noise amplification;

means for downconversion from RF to a first IF level:

means for quadrature downconversion:

means for sampling and for A/D-conversion for subsequent signal processing;

means for analytical multicarrier demodulation signal processing; means for baseband processing.

77. So. A base station according to one of claims χ or χ said base station comprising:

an upstream reception system with a FFT demodulation system comprising: means for low noise amplification:

means for downconversion from RF to a first IF level;

means for quadrature downconversion;

means for sampling and for A/D-conversion for subsequent signal processing:

means for analytical FFT signal processing; means for baseband processing.

ABSTRACT


A base station for broadcasting or re-broadcasting of TV and/or audio and/or data signals, said station comprising:


means for transmitting downstream signals from said base station to at least one user terminal:

means for receiving upstream signals transmitted from said at least one user terminal:

means for transmitting a high-precision beacon signal as reference signal for the generation of said upstream signals.

()

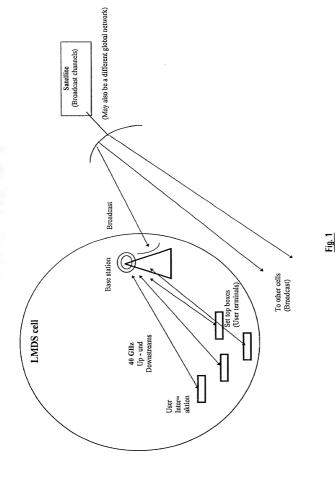



Communication between the base stations

Fig. 2

0



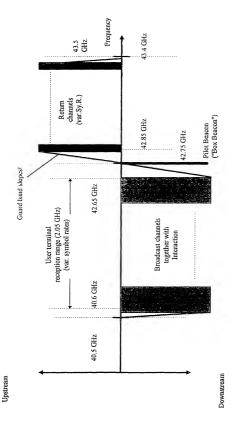


Fig. 3

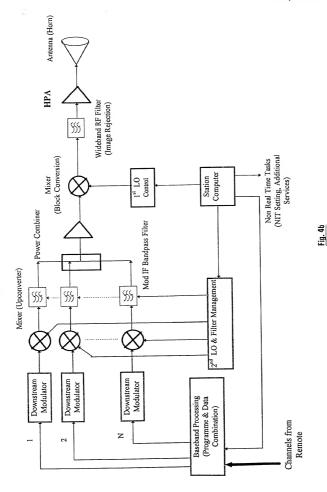

ig. 4a

)



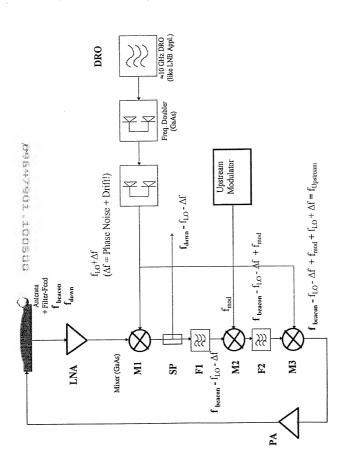


Fig. 5

DEBLOY FOR CHUSC

()

Fig. 6

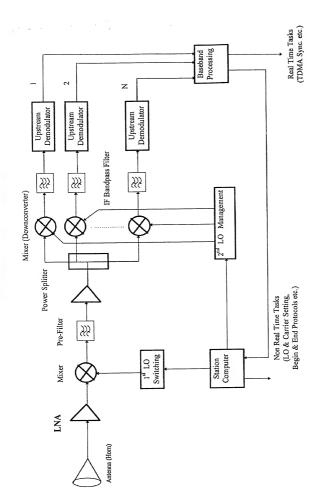


Fig. 7

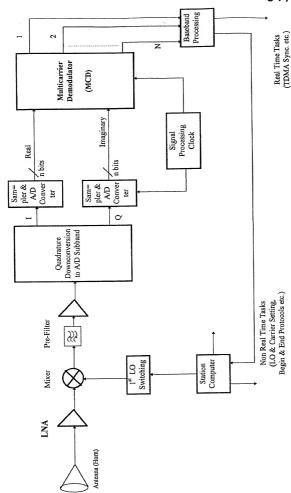


Fig. 8

)

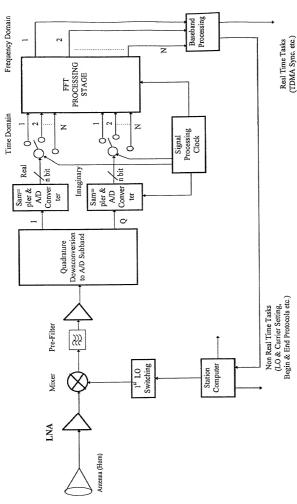


Fig. 9

(Transmitter)

1



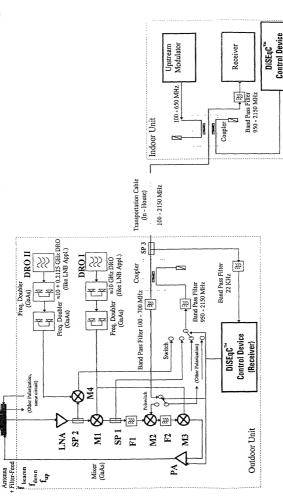


Fig. 10

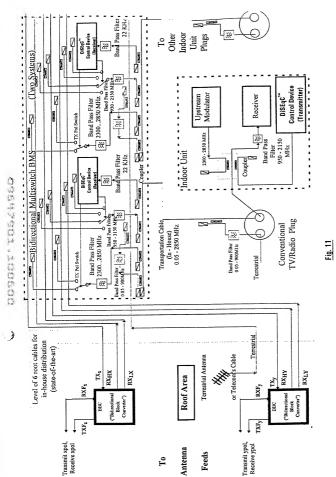

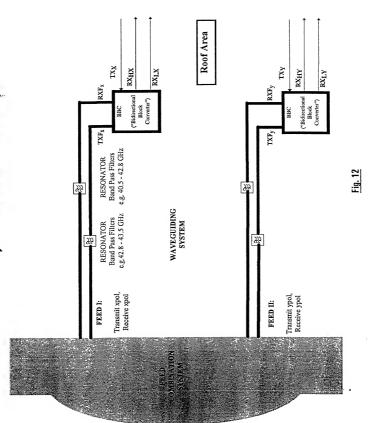

DECLARATION AND POWER OF ATTORNEY (Attorney Docket No. 108627.124)

As a below-named co-inventors, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

BI-DIRECTIONAL BROADCASTING SYSTEM

the specification of which (check only one):

[X]	is attached hereto.
[]	was filed as United States Patent Application Serial No
	and was amended
	on
	(if applicable)
[]	was filed as PCT Patent Application Serial No.
	on
	and was amended under PCT Article 19
	on
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the claims of this application in accordance with Title 37, Code of Federal Regulations, Sections 1.56(a) and 1.56(b).

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119(a)-(d) or 365(b):

COUNTRY (if PCT indicate PCT)	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 U.S.C. §119(a)- (b) or 365(b) (YES/NO)
PCT	EP99/02424	April 9, 1999	YES
Europe	98106597.2	April 9, 1998	YES

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional patent application(s) listed below:

APPLICATION NUMBER

DATE OF FILING

STATUS: (PENDING OR ABANDONED)

I hereby claim the benefit under Title 35, United States Code, § 120 or 365(c) of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATION OR PCT INTERNATIONAL APPLICATION(S) DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120 or 365(c):

APPLICATION NUMBER

DATE OF FILING (day, month, year) STATUS: (PATENTED, PENDING OR ABANDONED)

Michael J. Bevilacqua	Reg. No. 31,091
James B. Lampert	Reg. No. 24,564
Wayne M. Kennard	Reg. No. 30,271
Hollie L. Baker	Reg. No. 31,321
Wayne A. Keown	Reg. No. 33,923
Donald R. Steinberg	Reg. No. 37,241
Michael A. Diener	Reg. No. 37,122
Richard A. Goldenberg	Reg. No. 38,895
Peter M. Dichiara	Reg. No. 38,005
Ann-Louise Kerner	Reg. No. 33,523
Colleen Superko	Reg. No. 39,850
Gretchen Rice	Reg. No. 37,429
Keum J. Park	Reg. No. 42,059
Jason A. Reyes	Reg. No. 41,513
Janice M. Klunder	Reg. No. 41,121
Henry N. Wixon	Reg. No. 32,073
Barbara A. Barakat	Reg. No. 32,190

the mailing address and telephone number of each of whom is HALE AND DORR LLP, 60 State Street, Boston, Massachusetts 02109 and (617) 526-6000, with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence To

Full name of first inventor: Johannes Heichler

Direct Telephone Calls To

Wayne M. Kennard Hale and Dorr LLP 60 State Street Boston, MA 02109 Wayne M. Kennard (617) 526-6183

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements

were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's signature	Date
Country of Citizenship: Germany	
Residence: Ottenhofen, Germany	
Post Office Address: Gartenstr. 21, D-85570	
Full name of second inventor: David Gillies	Date

Country of Citizenship: the United Kingdom

Residence: Zorneding, Germany

Post Office Address: Ringstr. 4, D-85604

Full name of third inventor: Wolfgang Henselmann-Weiss			
Inventor's signature	Date		
Country of Citizenship: Germany	•		
Residence: Munich, Germany			
Post Office Address: Koenig-Heinrich-Str. 10, D-81925			
Full name of fourth inventor: Andreas Kempf			
Inventor's signature	Date		
Country of Citizenship: Germany	Country of Citizenship: Germany		
Residence: <u>Fuessen, Germany</u>			
Post Office Address: Koellespitzweg 11, D-87629			
Full name of fifth inventor: Gabor Toth			
Inventor's signature	Date		
Country of Citizenship: Germany			
Residence: Ottendichl, Germany			

sutton_anthony Z:\Legal\108627.124\decpoa.wpf_wpd.doc

Post Office Address: Martin-Edelbauer-Str. 21, D-85540

<u>DECLARATION AND POWER OF ATTORNEY</u> (Attorney Docket No. 108627.124)

As a below-named co-inventors, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

BI-DIRECTIONAL BROADCASTING SYSTEM

the specification of which (check only one):

[X]	is attached hereto.	
[]	was filed as United States Patent Application Serial Noand was amended	
	on(if applicable)	-
[]	was filed as PCT Patent Application Serial No	-
	on and was amended under PCT Article 19 on	_
	(if applicable)	

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the claims of this application in accordance with Title 37, Code of Federal Regulations, Sections 1.56(a) and 1.56(b).

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filled by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. \$119(a)-(d) or 365(b):

COUNTRY (if PCT indicate PCT)	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 U.S.C. §119(a)- (b) or 365(b) (YES/NO)
PCT	EP99/02424	April 9, 1999	YES
Europe	98106597.2	April 9, 1998	YES

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional patent application(s) listed below:

APPLICATION NUMBER

DATE OF FILING

STATUS: (PENDING OR ABANDONED)

I hereby claim the benefit under Title 35, United States Code, § 120 or 365(c) of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATION OR PCT INTERNATIONAL APPLICATION(S) DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120 or 365(e):

APPLICATION NUMBER

DATE OF FILING (day, month, year) STATUS: (PATENTED, PENDING OR ABANDONED)

Reg. No. 31,091
Reg. No. 24,564
Reg. No. 30,271
Reg. No. 31,321
Reg. No. 33,923
Reg. No. 37,241
Reg. No. 37,122
Reg. No. 38,895
Reg. No. 38,005
Reg. No. 33,523
Reg. No. 39,850
Reg. No. 37,429
Reg. No. 42,059
Reg. No. 41,513
Reg. No. 41,121
Reg. No. 32,073
Reg. No. 32,190

the mailing address and telephone number of each of whom is HALE AND DORR LLP, 60 State Street, Boston, Massachusetts 02109 and (617) 526-6000, with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence To

Direct Telephone Calls To

Wayne M. Kennard Hale and Dorr LLP 60 State Street Boston, MA 02109

Residence: Zorneding, Germany

Post Office Address: Ringstr. 4, D-85604

Wayne M. Kennard (617) 526-6183

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements

were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: Johannes Heichler	
Inventor's signature	Date
Country of Citizenship: Germany	
Residence: Ottenhofen, Germany	
Post Office Address: Gartenstr. 21, D-85570	
Full name of second inventor: David Gillies	
Inventor's signature	Date
Country of Citizenship: the United Kingdom	

Full name of third inventor: Wolfgang Henselmann-Weiss Inventor's signature W. Henselman-Mel	Date 18 5.00
Inventor's signature	
Country of Citizenship: Germany	
Residence: Munich, Germany	
Post Office Address: Koenig-Heinrich-Str. 10, D-81925	
Full name of fourth inventor: Andreas Kempf	
Inventor's signature	Date
Country of Citizenship: Germany	•
Residence: Fuessen, Germany	
Post Office Address: Koellespitzweg 11, D-87629	
Full name of fifth inventor: Gabor Toth	
Inventor's signature	Date
Country of Citizenship: Germany	
Residence: Ottendichl, Germany	
Post Office Address: Martin-Edelbauer-Str. 21, D-85540	

sutton_anthony Z.\Legal\108627.124\decpoa.wpf_wpd.doc

DECLARATION AND POWER OF ATTORNEY (Attorney Docket No. 108627.124)

As a below-named co-inventors, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

BI-DIRECTIONAL BROADCASTING SYSTEM

the specification of which (check only one):

[X]	is attached hereto.	
[]	was filed as United States Patent Application Serial Noand was amended	
	on(if applicable)	
[]	was filed as PCT Patent Application Serial No	
	onand was amended under PCT Article 19	-
	on(if applicable)	

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the claims of this application in accordance with Title 37, Code of Federal Regulations, Sections 1.56(a) and 1.56(b).

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119(a)-(d) or 365(b):

COUNTRY (if PCT indicate PCT)	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 U.S.C. §119(a)- (b) or 365(b) (YES/NO)
PCT	EP99/02424	April 9, 1999	YES
Europe	98106597.2	April 9, 1998	YES

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional patent application(s) listed below:

APPLICATION NUMBER DATE OF FILING STATUS: (PENDING OR ABANDONED)

I hereby claim the benefit under Title 35, United States Code, § 120 or 365(c) of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATION OR PCT INTERNATIONAL APPLICATION(S) DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120 or 365(c):

APPLICATION NUMBER	DATE OF FILING	STATUS: (PATENTED, PENDING
M I Electricition	(day, month, year)	OR ABANDONED)

Michael J. Bevilacqua	Reg. No. 31,091
James B. Lampert	Reg. No. 24,564
Wayne M. Kennard	Reg. No. 30,271
Hollie L. Baker	Reg. No. 31,321
Wayne A. Keown	Reg. No. 33,923
Donald R. Steinberg	Reg. No. 37,241
Michael A. Diener	Reg. No. 37,122
Richard A. Goldenberg	Reg. No. 38,895
Peter M. Dichiara	Reg. No. 38,005
Ann-Louise Kerner	Reg. No. 33,523
Colleen Superko	Reg. No. 39,850
Gretchen Rice	Reg. No. 37,429
Keum J. Park	Reg. No. 42,059
Jason A. Reyes	Reg. No. 41,513
Janice M. Klunder	Reg. No. 41,121
Henry N. Wixon	Reg. No. 32,073
Barbara A. Barakat	Reg. No. 32,190

the mailing address and telephone number of each of whom is HALE AND DORR LLP, 60 State Street, Boston, Massachusetts 02109 and (617) 526-6000, with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence To

Direct Telephone Calls To

Wayne M. Kennard Hale and Dorr LLP 60 State Street Boston, MA 02109 Wayne M. Kennard (617) 526-6183

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements

were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: Johannes Heichler			
Inventor's signature	Date		
Country of Citizenship: Germany			
Residence: Ottenhofen, Germany			
Post Office Address: Gartenstr. 21, D-85570			
Full name of second inventor: David Gillies			
Inventor's signature	Date		
Country of Citizenship: the United Kingdom			
Residence: Zorneding, Germany			
Post Office Address: Ringstr. 4, D-85604			

Full name of third inventor: Wolfgang Henselmann-Weiss				
Inventor's signature	Date			
Country of Citizenship: Germany	*			
Residence: Munich, Germany				
Post Office Address: Koenig-Heinrich-Str. 10, D-81925				
Full name of fourth inventor: Andreas Kempf Inventor's signature				
Country of Citizenship: Germany)			
Residence: Fuessen, Germany	•			
Post Office Address: Koellespitzweg 11, D-87629				
Full name of fifth inventor: Gabor Toth				
Inventor's signature	Date			
Country of Citizenship: Germany				
Residence: Ottendichl, Germany				
Post Office Address: Martin-Edelbauer-Str. 21, D-85540				

sutton_anthony Z:\Legal\108627.124\decpoa.wpf_wpd.doc

DECLARATION AND POWER OF ATTORNEY (Attorney Docket No. 108627.124)

As a below-named co-inventors, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

BI-DIRECTIONAL BROADCASTING SYSTEM

the specification of which (check only one):

[X]	is attached hereto.	
[]	was filed as United States Patent Application Serial No	
	and was amended	
	on(if applicable)	
	(if applicable)	
[]	was filed as PCT Patent Application Serial No.	
	on and was amended under PCT Article 19	
	on	
	(if applicable)	

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the claims of this application in accordance with Title 37, Code of Federal Regulations, Sections 1.56(a) and 1.56(b).

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. \$119(a)-(d) or 365(b):

COUNTRY (if PCT indicate PCT)	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 U.S.C. §119(a)- (b) or 365(b) (YES/NO)
PCT	EP99/02424	April 9, 1999	YES
Europe	98106597.2	April 9, 1998	YES

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional patent application(s) listed below:

APPLICATION NUMBER DATE OF FILING STATUS: (PENDING OR ABANDONED)

I hereby claim the benefit under Title 35, United States Code, § 120 or 365(c) of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filling date of the prior applications and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATION OR PCT INTERNATIONAL APPLICATION(S) DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120 or 365(c):

APPLICATION NUMBER	DATE OF FILING	STATUS: (PATENTED, PENDING
	(day, month, year)	OR ABANDONED)

Michael J. Bevilacqua	Reg. No. 31,091
James B. Lampert	Reg. No. 24,564
Wayne M. Kennard	Reg. No. 30,271
Hollie L. Baker	Reg. No. 31,321
Wayne A. Keown	Reg. No. 33,923
Donald R. Steinberg	Reg. No. 37,241
Michael A. Diener	Reg. No. 37,122
Richard A. Goldenberg	Reg. No. 38,895
Peter M. Dichiara	Reg. No. 38,005
Ann-Louise Kerner	Reg. No. 33,523
Colleen Superko	Reg. No. 39,850
Gretchen Rice	Reg. No. 37,429
Keum J. Park	Reg. No. 42,059
Jason A. Reyes	Reg. No. 41,513
Janice M. Klunder	Reg. No. 41,121
Henry N. Wixon	Reg. No. 32,073
Barbara A. Barakat	Reg. No. 32,190

the mailing address and telephone number of each of whom is HALE AND DORR LLP, 60 State Street, Boston, Massachusetts 02109 and (617) 526-6000, with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence To

Direct Telephone Calls To

Wayne M. Kennard Hale and Dorr LLP 60 State Street Boston, MA 02109 Wayne M. Kennard (617) 526-6183

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements

were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: Johannes Heichler			
Inventor's signature	Date		
Country of Citizenship: Germany			
Residence: Ottenhofen, Germany			
Post Office Address: Gartenstr. 21, D-85570			
Full name of second inventor: David Gillies			
Inventor's signature	Date		
Country of Citizenship: the United Kingdom			
Residence: Zorneding, Germany			
Post Office Address: Ringstr. 4, D-85604			

Full name of third inventor: Wolfgang Henselmann-Weiss				
Inventor's signature	Date			
Country of Citizenship: Germany	•			
Residence: Munich, Germany				
Post Office Address: Koenig-Heinrich-Str. 10, D-81925				
Full name of fourth inventor: Andreas Kempf	Date			
Inventor's signature	Date			
Country of Citizenship: Germany	3			
Residence: <u>Fuessen, Germany</u>				
Post Office Address: Koellespitzweg 11, D-87629 Full name of fifth inventor: Galor Toth Inventor's signature	Date <i>18.09.2000</i>			
Country of Citizenship:				
Residence: Ottendichl, Germany				
Post Office Address: Martin-Edelbauer-Str. 21, D-85540				

 $sutton_anthony~Z:\\ Legal\\ 108627.124\\ decpoa.wpf_wpd.doc$

<u>DECLARATION AND POWER OF ATTORNEY</u> (Attorney Docket No. 108627.124)

As a below-named co-inventors, I hereby declare that:

My residence, post office address and citizenship is as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

BI-DIRECTIONAL BROADCASTING SYSTEM

the specification of which (check only one):

[X]	is attached hereto.
[]	was filed as United States Patent Application Serial No
	and was amended
	on
	(if applicable)
[]	was filed as PCT Patent Application Serial No.
	on
	and was amended under PCT Article 19
	on
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the claims of this application in accordance with Title 37, Code of Federal Regulations, Sections 1.56(a) and 1.56(b).

I hereby claim foreign priority benefits under Title 35, United States Code, \$119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. §119(a)-(d) or 365(b):

COUNTRY (if PCT indicate PCT)	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 U.S.C. §119(a)- (b) or 365(b) (YES/NO)
PCT	EP99/02424	April 9, 1999	YES
Europe	98106597.2	April 9, 1998	YES

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional patent application(s) listed below:

APPLICATION NUMBER

DATE OF FILING

STATUS: (PENDING OR ABANDONED)

I hereby claim the benefit under Title 35, United States Code, § 120 or 365(c) of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior applications and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATION OR PCT INTERNATIONAL APPLICATION(S) DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120 or 365(c):

APPLICATION NUMBER

DATE OF FILING (day, month, year) STATUS: (PATENTED, PENDING OR ABANDONED)

POWER OF ATTORNEY: As named inventors, we hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith



Reg. No. 31,091 Michael J. Bevilacqua Reg. No. 24,564 James B. Lampert Reg. No. 30,271 Wayne M. Kennard Reg. No. 31,321 Hollie L. Baker Reg. No. 33,923 Wayne A. Keown Donald R. Steinberg Reg. No. 37,241 Reg. No. 37,122 Michael A. Diener Reg. No. 38,895 Richard A. Goldenberg Reg. No. 38,005 Peter M. Dichiara Reg. No. 33,523 Ann-Louise Kerner Reg. No. 39,850 Colleen Superko Reg. No. 37,429 Gretchen Rice Reg. No. 42,059 Keum J. Park Jason A. Reves Reg. No. 41,513 Reg. No. 41,121 Janice M. Klunder Reg. No. 32,073 Henry N. Wixon Reg. No. 32,190 Barbara A. Barakat

Reg. No. 43,545 Nancy Chiu Reg. No. 35,761 Rajesh Vallabh Ayla A. Lari Reg. No. 43,739

the mailing address and telephone number of each of whom is HALE AND DORR LLP, 60 State Street, Boston, Massachusetts 02109 and (617) 526-6000, with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Send Correspondence To

Direct Telephone Calls To

Wavne M. Kennard Hale and Dorr LLP 60 State Street Boston, MA 02109

Wayne M. Kennard (617) 526-6183

Wherefore I petition that letters patent be granted to me for the invention or discovery described and claimed in the attached specification and claims, and hereby subscribe my name to said specification and claims and to the foregoing declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements

were made with the knowledge that willful false statements and the like so made are punishable by fine of imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.			
Full name of first inventor: Johannes Heichler Inventor's signature Date 19, 3, 6000			
Country of Citizenship: Germany			
Residence: Ottenhofen, Germany DEX			
Post Office Address: Gartenstr. 21, D-85570			
Full name of second inventor: David Gillies			
Inventor's signature Date			
Country of Citizenship: the United Kingdom			
Residence: Zorneding, Germany			



Post Office Address: Ringstr. 4, D-85604

	Inventor's signature	Date
	Country of Citizenship: Germany	•
	Residence: Munich, Germany DEX	
	Post Office Address: Koenig-Heinrich-Str. 10, D-81925	
	Full name of fourth inventor: Andreas Kempf	
	Inventor's signature	Date
,	Inventor s signature	
	Country of Citizenship: Germany	,
	Residence: <u>Fuessen</u> , <u>Germany</u> DEX	
	Post Office Address: Koellespitzweg 11, D-87629	
	Full name of fifth inventor: Gabor Toth	
0	Inventor's signature	Date
o ^R	Country of Citizenship: Germany	
	Residence: Ottendichl, Germany DEX	
	Post Office Address: Martin-Edelbauer-Str. 21, D-85540	

 $sutton_anthony~Z: \\ \\ Legal\\ \\ 108627.124\\ \\ \\ decpoa.wpf_wpd.doc$

Full name of third inventor: Wolfgang Henselmann-Weiss